


Cylinder JET

Directly print on the surface of cylinder containers

This system maximumly educe the advantage of direct inkjet printing.

Correspondence work diameter is between 5 to 10cm.

Using white ink makes the design look more attractive and it' s also effective as undercoat.

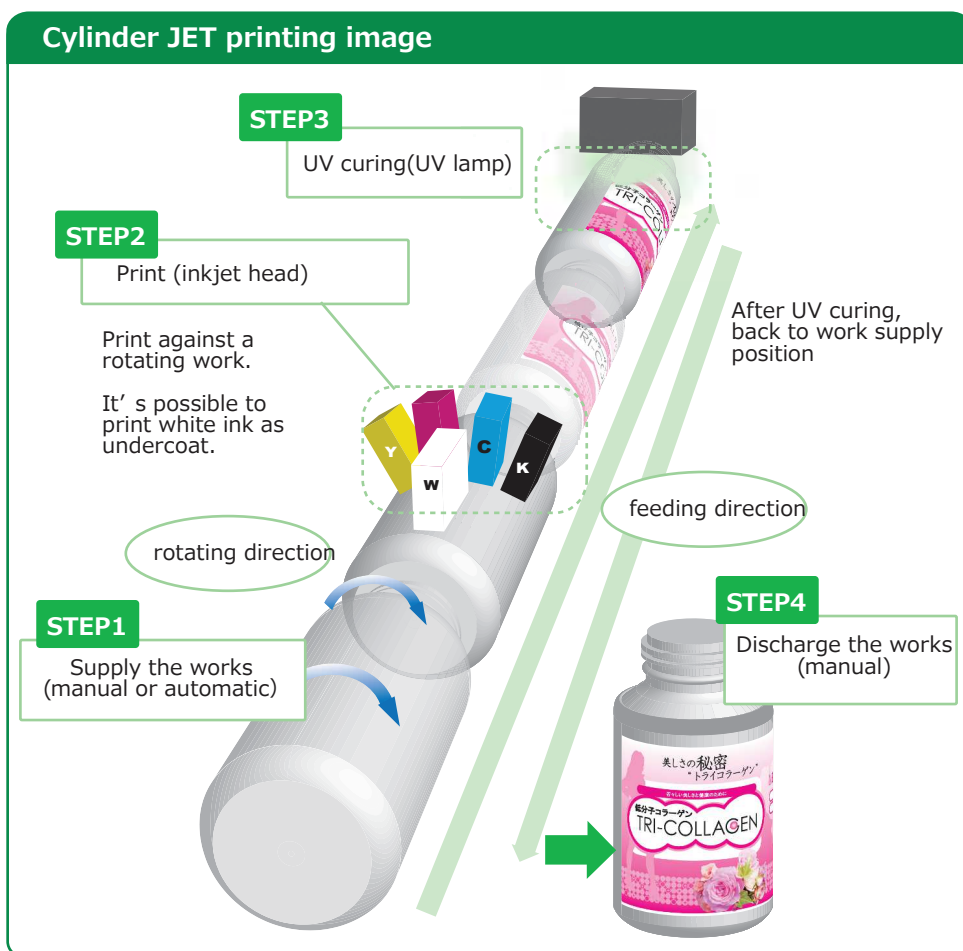

Expand the new print field possibility and idea

Corresponding to customer request large variety · small quantity
You can print even a single unit

stockless & short delivery using digital data

Good for making novelty items and sampling package

variable data (variable print) compatible high design · high quality

On-Demand-Print by inkjet makes it possible



● Image of Cylinder JET



● Sample printed by Cylinder JET

● Cylinder JET standard specification

Items	Specification
Supported head type	UV head, 72mmwidth, 360dpi
No. of head	Typical 5 heads for CMYKW (optional upon request)
Print size	according to work size
Print method	Single pass or 2 pass
Print resolution	360dpi,720dpi for X,Y direction (optional)
Ink supply	Sub tank(main tank & sub tank method is optional)
Image file format	Tiff format 1bit or 8bit Tiff
Software	Windows application software
Printer size	1600mm(W)1500mm(D) 1800mm(H)
Head maintenance	Manual or automatic
Safeguard system	Emergency stopping function

■ Please contact us for more details.
Issue data : 2010/09/28
This contents are subject to change without prior notice for technical improvement.