


Roll JET

High speed Single-Pass inkjet printer.


Features

- High speed roll to roll printing process.
- A single pass print.
- Customize service is available.
- An automatic printhead maintenance system is adopted.

KYOCERA · KONICA MINOLTA · Toshiba tec heads could be arranged.

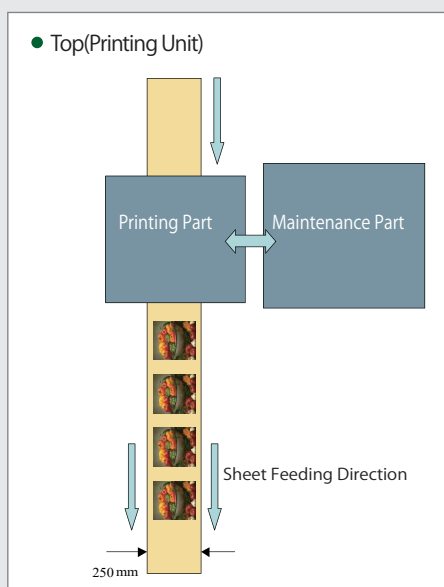

System Structure & Specification

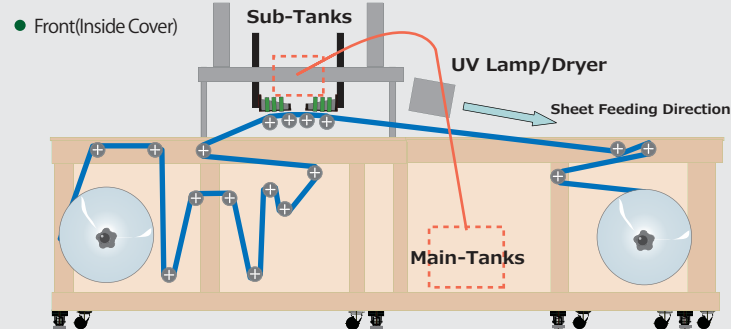

Items	Specification
Head Types	For Water-base, Solvent, UV ink
Number of Head	Request base
Head Heater Control	Depend on Head Maker
Roll Width	Standard:300mm(Media width:250mm)
Core Diameter	3-inch. (able to change up to 6-inch)
Roll Outer Diameter	Max.500mm
Roll Weight	Max.30Kg
Feeding Speed	Max.200m/min.
Printing Method	Single-pass (Roll to Roll)
Printing Resolution	Depend on Head.
Ink Supplying System	Main-tank & Sub-tank
Ink Controlling System	Negative Pressure Regulation
Head Height Adjustment	Manual Adjustment(up to 25mm)
Image File Format	Tiff File
Software	Windows Application Software
Dimensions	3570mm(W)1370mm(D) 1705mm(H)
Options	UV Lamp
Security System	Emergency Stop Switch · Door Interlock Mechanism

The above are basic specifications. Customization is acceptable.

Contact us

▶▶▶ **Tritek Co., Ltd.** Market research dept. Sales group

931-35 Karuigawa, Kashiwazaki-city,
Niigata, 945-1355, Japan
Operation time : 8:30~17:30(weekday)

☎ 0257-24-7123 ☎ 0257-24-7550
✉ eigy@tritek.co.jp 🌐 <http://www.tritek.co.jp>